

Belt conveyor KB7020



Features

- High **capacity**
- **Conveying angle** adjustable 0 – 45°
- **Speed** continuously adjustable
- Easy **height adjustment**
- **Optimum viewing** thanks to large inspection windows
- Easy assembly and disassembly in **only 5 steps** without tools
- **Quick release mechanism** with preset belt tension
- Wave profile belt for **gentle conveying** of products
- Inlet hopper with **quick assembly clamp**

Belt conveyor Model KB7020

- Conveying of tablets of 3–35 mm diameter, and capsules

Design




- Constructed according to GMP specifications
- Horizontal and upward conveying of tablets (up to 45°)
- The process can be monitored visually at all times through a large acrylic window
- For cleaning the belt conveyor can be disassembled easily and without tools by a single person
- Low maintenance

Measurements

- Various belt lengths available (1500, 2000 or 2500 mm)
- Belt width outside: 193 mm, inside: 110 mm


Features

- The conveying speed is continuously adjustable between 0 – 0.3 m/s
- The height is adjustable using a telescopic column
- Capacity per hour: up to 3 m³

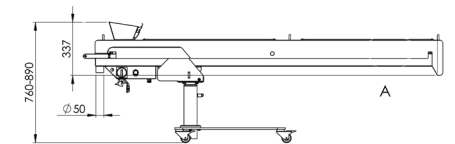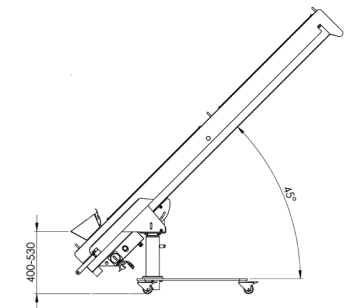

Belt conveyor type		KB7020	
Dimensions			
Weight	kg	70 – 110	
Outlet height 45°	mm	1266 – 1995	
Inlet height 45°	mm	400 – 530	
Inlet height 0°	mm	760 – 890	
Outlet aperture	mm	210 x 110	
Inlet hopper	mm	210 x 185	
Technical Data			
Power supply 100 – 240 V, 50 / 60 Hz			
Maximum current	A	1	
Protection rating of drive unit		IP50	

Krämer
www.kraemerag.com



Inlet hopper with quick assembly clamp



Large inspection window



Quick release mechanism